MTL4541P

REPEATER POWER SUPPLY

4/20mA, HART®, for 2- or 3-wire transmitters

The MTL4541P provides a fully-floating dc supply for energising a conventional 2- or 3-wire 4/20mA transmitter which is located in a hazardous area, and repeats the current in another circuit to drive a safe-area load. For HART 2-wire transmitters, the unit allows bidirectional communications signals superimposed on the 4/20mA signal.

The MTL4541P is a higher power version of the MTL4541B, usable for all gas groups provided that the field equipment is suitably certified.

SPECIFICATION

See also common specification

Number of channels

One

Location of transmitter

Zone 0, IIC, T4-6 hazardous area if suitably certified

Div. 1, Group A hazardous location

Safe-area output

Signal range: 4 to 20mA Under/over-range: 0 to 24mA

Safe-area load resistance: 0 to 360 Ω @ 24mA

0 to 450Ω @ 20mA

Safe-area circuit output resistance: $> 1M\Omega$

Safe-area circuit ripple

<50µA peak-to-peak **Hazardous-area input**

Signal range: 0 to 24mA (including over-range)

Transmitter voltage: 17.6V at 20mA

Transfer accuracy at 20°C

Better than 15µA

Temperature drift


< 0.8µA/°C

Response time
Settles to within 10% of final value within 50µs

Communications supported

HART® (terminals 1 & 2 only)

MTL4541P

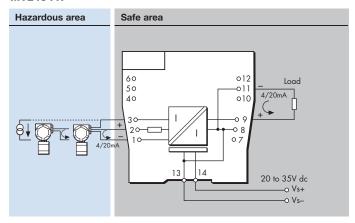

Note: Safe area output referenced to PSU -ve

LED indicator

Green: power indication

Maximum current consumption (with 20mA signal)

51mA at 24V

Power dissipation within unit (with 20mA signal)

0.7W at 24V

Safety description

Terminals 2 to 1 and 3:

 $V_o=28V$ $I_o=116.6$ mA $P_o=820$ mW $U_m=253V$ rms or dc

Terminals 1 to 3:

Simple apparatus \leq 1.5V, \leq 0.1A and \leq 25mW; can be connected without further certification into any IS loop with an open-circuit voltage <28V

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.

