



technical datasheet

ZoneBarrier Telcom

Protects network and communications applications against induced surges and transients

- Wall, DIN rail or 19: rack mountable
- Expandable, modular protection for one to an unlimited number of ports
- Three stage protection
- UL 497A Listed
- Tested to IEC 61000-4-5 and CCITT K1
- 10 year product warranty



The ZoneBarrier Series is a unique, modular protection system for telecommunication equipment. By providing an effective barrier between uncontrolled transient environments and your valuable equipment the ZoneBarrier Series protects you from costly system down time and equipment failure.

Designed for multi-port or single-port applications the ZoneBarrier Series offers a flexible, bespoke, surge protection solution that is capable of growing with your requirements. A ZoneBarrier module can be used as a stand alone device, providing protection for a single modem or fax machine perhaps, or as a building block in a surge protection solution that exactly fits your requirements.

The sophisticated hybrid circuitry employed by the ZoneBarrier Series protects your equipment without impeding normal operation. ZoneBarrier protection components comprise of a combination of solid state overvoltage protectors (sidactors) and positive temperature coefficient (PTC) devices to form three distinct stages of protection. This combination of high quality surge protection components gives the ZoneBarrier Series its characteristic low limiting voltage and high surge current capacity which provides excellent protection.

All common telecommunication systems can be protected by the ZoneBarrier Series. ZoneBarrier modules are available for Leased Line, Digital Data Service, T1, E1 and 2-wire ISDN and are available with a range of connection types.

The small foot print of ZoneBarrier modules allows a single module to be conveniently located near to the equipment it is protecting. Where multiple modules are required in a concentrated area ZoneBarrier modules can be mounted on standard DIN rail. Optional DIN rail assemblies are available including one suitable for 19" rack applications, which can hold up to 32 ZoneBarrier modules, providing protection of an impressive 32 lines in less than a 3U space (13.2cm).

Additional protection circuitry should be provided for other systems which may be interconnected with your telecommunication equipment e.g. power feeds, IT networks, fire and security systems. ZoneBarrier modules are available to meet these requirements.

901-129 Rev E 110511

**COOPER** Crouse-Hinds

www.mtl-inst.com

enquiry@mtl-inst.com

SPECIFICATION

Ambient temperature limits

-4°F to +185°F (working)
-20°C to +85°C (working)

Humidity

95% RH (non-condensing)

Casing

Moulded plastic

Weight

2.8oz (0.08Kg)

Dimensions

See figure 1

EMC compliance

BS EN 60950: 1992
BS EN 61000-6-2: 1999
BS EN 61010-1: 1993

R&TTE compliance

BS EN 50082-2: 1995
BS EN 41003: 1999

Model	Type	Wires	Working voltage (V)	Let-through voltage (V)	Maximum continuous operating voltage (V)	Bandwidth	Connectors
ZB24501	Dial up	2	200	270	215	N/A	RJ11/RJ45
ZB24503	Leased line	4	75	105	80	N/A	RJ11/RJ45
ZB24504	Leased line	4	75	105	80	N/A	Terminal strip
ZB24505	Digital data	4	75	105	80	>10MHz	RJ48S
ZB24525	Dial up	4	200	270	215	N/A	RJ11/RJ45
ZB24558	T1	4	16	20	88	>50MHz	RJ48C
ZB24562	ADSL	4	200	270	215	50MHz	RJ11/RJ45

Installation

All ZoneBarrier modules are installed in-line and are identified with "Protected" and "Un-protected" for fail-safe installation.

DIN rail mounting (figure 2)

ZoneBarrier modules can be mounted on any standard T-section DIN rail or on the optional 19" DIN rail assembly. To attach the ZoneBarrier module to the DIN rail, simply locate the DIN rail foot of the module over on edge of the DIN rail and then securely push the ZoneBarrier onto the DIN rail. Note the DIN rail must be properly grounded.

Stand-alone installation (figure 3)

To install a ZoneBarrier module as a stand-alone protector, attach an ground lead to the supplied ring terminal and secure this with the self tapping screw provided to the base of the unit. Using screws (or bolts) mount the module on any flat surface.

To order specify -

Model number as per specification table above

DIN rail mounting options

DR21607 5" DIN rail
for up to 4 ZoneBarriers

DR21649 17.5" DIN rail
for up to 16 ZoneBarriers

DR24500 19" DIN rail (with mounting brackets) for up to 32 ZoneBarriers

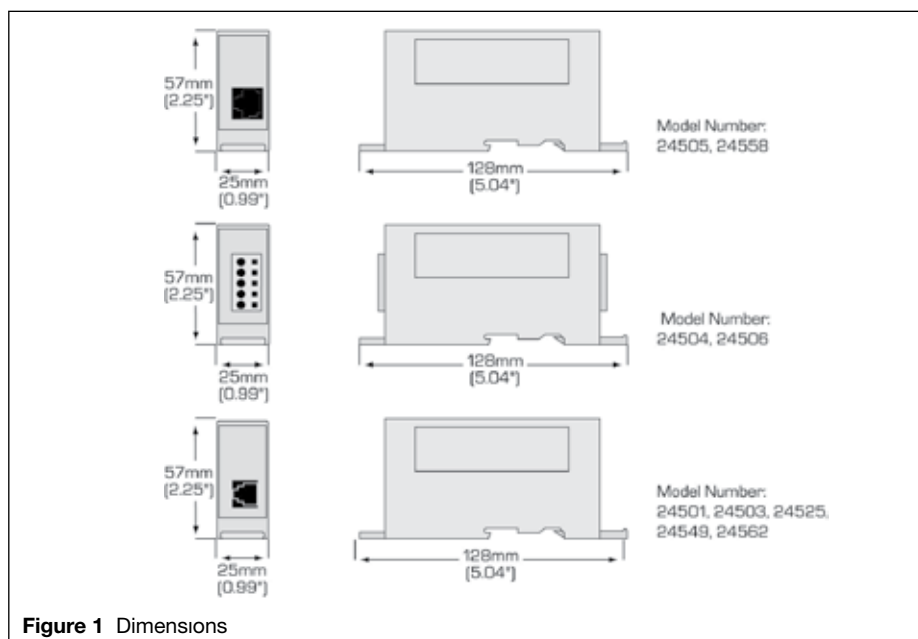


Figure 1 Dimensions

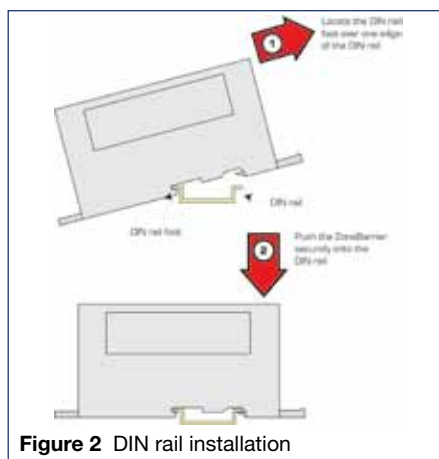


Figure 2 DIN rail installation

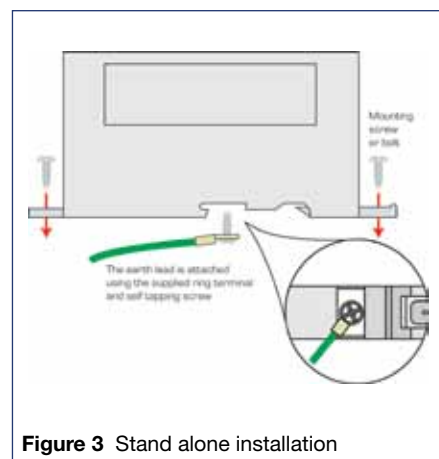


Figure 3 Stand alone installation

Approvals

Country	Standard/Authority	Approved for	Product
United States & Canada	UL 497B Listed	Telecommunications	ZB24501, ZB24503, ZB24504 ZB24505, ZB24506, ZB24525, ZB24562
United States & Canada	UL 497B Listed	Isolated Loop	ZB24458

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.



EUROPE (EMEA): +44 (0)1582 723633
enquiry@mtl-inst.com

THE AMERICAS: +1 800 835 7075
csinfo@mtl-inst.com

ASIA-PACIFIC: +65 6 645 9888
sales.mtlsing@cooperindustries.com

901-129 Rev E 110511